


INSERTA TEE® SPECIFICATIONS

C900 GASKETED BELL GRAVITY APPLICATIONS

- A.** Bell end accepts pipe with C900*, or equivalent O.D. specification in 4", 6", 8", 10", 12", 14", 16" and 18" sizes
- B.** Curvature varies with mainline diameters
- C.** Spigot end PVC SDR35, ASTM D 3034
Diameters: 4", 6", 8", 10", 12", 14", 16" & 18" sizes

* For additional sizes, contact factory

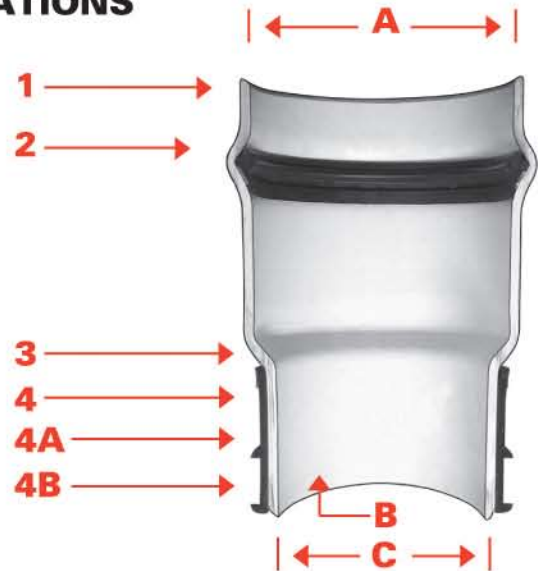

PART

1
2
3

PART NAME

Hub adaptor
Rubber Gasket
Securing Clamp*

MATERIALS

PVC SDR26 ASTM D 3034
ASTM F 477
Band SS #301
Screw SS #305
Housing SS #301
ASTM F 477

4
4A
4B

Rubber Sleeve
Upper Segment**
Lower Segment***

- * Optional: #316 Stainless Steel band, screw and housing
- ** Distance between 4A and 4B will vary by product type
- *** Will not appear on rubber sleeves for concrete or clay pipe

INSERTA TEE SIZE

4" (100 mm)
6" (150 mm)
8" (200 mm)
10" (250 mm)
12" (300 mm)
14"
16" & 18"

HOLE DIAMETER

4 1/2" (112.5 mm)
6 1/2" (162.5 mm)
8 3/4" (218.8 mm)
10 7/8" (271.9 mm)
12 7/8" (321.8 mm)
15 13/16"
19 3/16" (487.17mm)

NOTE: Recommended method of cutting hole is with hole saw for PVC and polyethylene, and diamond bit for concretes, clay and D.I. (See Installation Instruction)



phone 503.357.2110 fax 503.359.5417

email marty@insertatee.com

www.insertatee.com

