


INSERTA TEE SPECIFICATIONS

SDR35 GASKETED BELL GRAVITY APPLICATIONS

- A.** Bell end accepts pipe with SDR35, ASTM D3034 or equivalent O.D. specification in 8", 10", 12", 15", 18", 21", 24", 27" and 30" sizes (for 4" and 6" sizes, refer to **Fatboy Specifications**)
- B.** Curvature varies with mainline diameters
- C.** Spigot end PVC SDR35, ASTM D3034
Diameters: 8", 10", 12", 15", 18", 21", 24", 27" and 30"

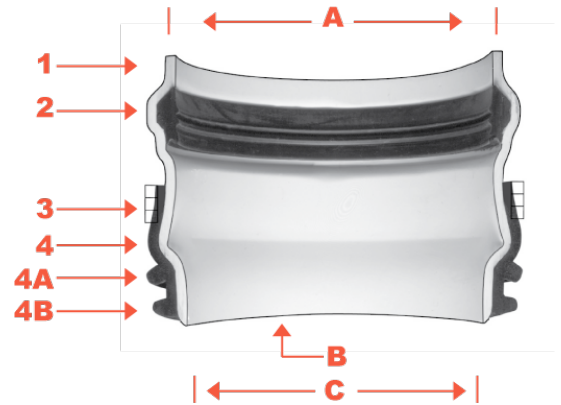

PART	PART NAME
1	Hub adaptor
2	Rubber Gasket
3	Securing Clamp*
4	Rubber Sleeve (available in Nitrile and EPDM by special order)
4A	Upper Segment**
4B	Lower Segment***

MATERIALS
 PVC SDR35 ASTM D3034
 ASTM F477
 Band SS #301
 Screw SS #305
 Housing SS #301
 ASTM F477

* Optional: #316 Stainless Steel band, screw and housing
 **Distance between 4A and 4B will vary by product type
 ***Will not appear on rubber sleeves for concrete or clay pipe

INSERTA TEE SIZE	HOLE DIAMETER
8" (200 mm)	8 3/4" (222 mm)
10" (250 mm)	10 7/8" (276 mm)
12" (300 mm)	12 7/8" (327 mm)
15" (375 mm)	15 13/16" (402 mm)
18" (450 mm)	19 3/16" (503 mm)
21" (525 mm)	22 9/16" (573 mm)
24" (600 mm)	25 5/16" (643 mm)
27" (675 mm)	28 1/2" (724 mm)
30" (750 mm)	32 17/32" (826 mm)

NOTE: Recommended method of cutting hole is with hole saw for PVC and other plastics, and diamond bit for concretes, clay, FRP and D.I. (See installation instructions. Hole saws are available for purchase or rent.)

Project Name:	Lateral Size:
Type of Mainline Pipe or Structure:	Mainline Size: