


FATBOY, SDR 26, SDR 35 GASKETED BELL GRAVITY APPLICATIONS

- A.** BELL END ACCEPTS PIPE WITH SDR 26, SDR 35 AND ASTM D3034 OR EQUIVALENT O.D. SPECIFICATION IN 4" AND 6" SIZES.
- B.** CURVATURE VARIES WITH MAINLINE DIAMETERS.
- C.** SPIGOT END SDR 26, PVC SDR 35, ASTM D3034 DIAMETERS: 4" AND 6"

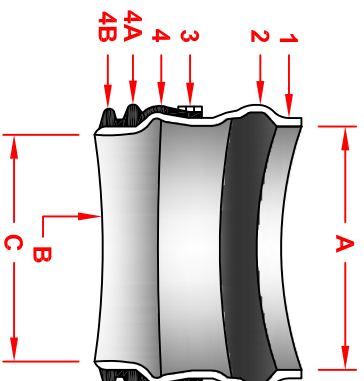


PART	PART NAME
1	HUB ADAPTOR
2	RUBBER GASKET
3	SECURING CLAMP*

4	RUBBER SLEEVE (AVAILABLE IN NITRILE AND EPDM BY SPECIAL ORDER)
4A	UPPER SEGMENT**
4B	LOWER SEGMENT***

MATERIALS
 PVC SDR 26 ASTM D3034
 ASTM F477
 BAND SS #301
 SCREW SS #305
 HOUSING SS #301
 ASTM F477

* OPTIONAL: #316 STAINLESS STEEL BAND, SCREW AND HOUSING
 ** DISTANCE BETWEEN 4A AND 4B WILL VARY BY PRODUCT TYPE
 *** WILL NOT APPEAR ON RUBBER SLEEVES FOR CONCRETE OR CLAY PIPE

INSERTA TEE SIZE	HOLE DIAMETER
4" (100 mm)	4 1/2" (114 mm)
6" (150 mm)	6 1/2" (165 mm)

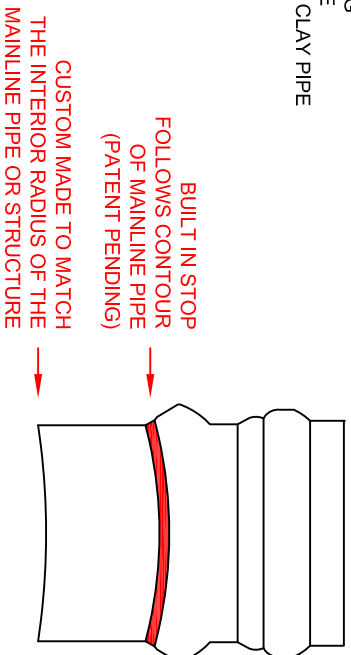

NOTE: RECOMMENDED METHOD OF CUTTING HOLE IS WITH HOLE SAW FOR PVC AND OTHER PLASTICS, AND DIAMOND BIT FOR CONCRETES, CLAY, FRP AND D.I. (SEE INSTALLATION INSTRUCTIONS. HOLE SAWS ARE AVAILABLE FOR PURCHASE OR RENT.)



INSERTA TEE | PO BOX 714
 CORNELIUS, OR 97116
 PH: (503) 357-2110 FAX: (503) 359-5417
 SALES@INSERTATEE.COM

FATBOY, SDR 26, SDR 35 GASKETED BELL GRAVITY APPLICATION SPECIFICATIONS	
SCALE:	NTS
DATE:	9/12/2013
DRAWN BY:	KLJ

THIS PRINT DISCLOSES SUBJECT MATTER IN WHICH INSERTA-TEE HAS PROPRIETARY RIGHTS. THE DESIGN OR INVENTION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF ANY RIGHTS OR TECHNOLOGY CONTAINED HEREIN OR MANUFACTURE OF ANY ARTICLE HEREIN OR ANY DISPOSITION THEREIN TO ANY OTHER PARTY WITHOUT THE WRITTEN PERMISSION OF INSERTA-TEE.